KMD-210ABE-HC

Crescent Ice Maker, Modular

Production Capacity (kg/24h) - AT 10°C, WT 10°C: 210

PRODUCT SERIES: CRESCENT ICEMAKERS
ITEM NUMBER: M099
COUNTRY OF ORIGIN: UK



Hoshizaki KMD-210ABE-HC is a modular ice maker producing up to 210 kg of crescent EDGE ice per 24 hours. This model is compatible with our storage bins.


Crescent EDGE ice dimensions and weight - disclaimer: The drawing is for illustration purposes only. Size and weight may be differ due to local installation conditions.

- CycleSaver® technology with doublesided stainless steel evaporator which produces ice on both sides
- Stainless steel evaporator allow the use of mineral removal deposit removal chemical. No 'flaking' of the evaporator
- EverCheckTM Control Board with audible alarm and diagnostic feature
- Ice making system with an automatic rinse cycle
- Fresh water every 10, 5, 2 or 1 cycle (10 is factory standard)
- Closed water circuit for contamination protection
- Electronic controller
- Cleanable air filter
- Compatible with standard 22" drink/ice dispenser systems

ICE TYPE: Crescent Edge







KM Edge Cube
Weight: 10 g

WARRANTY PERIOD	EXTERIOR
2 Years on Parts & Labour - based on country agreement	**Stainless steel AISI 441, Galvanized steel (Rear), Plastic (Louver)**

Refrigerant type: R290 / Refrigerant: 0,147 kg / CO2 equivalent: 0,441 kg

OPERATING CONDITIONS

Ambient temperature (minimum): 7 °C, Ambient temperature (maximum): 40 °C, Water supply pressure (minimum): 0.07MPa (0.7bar), Water supply pressure (maximum): 0.8MPa (8bar), Water supply temperature (minimum): 7 °C, Water supply temperature (maximum): 35 °C, Voltage range (Rated Voltage): 207-254V

OPTIONAL EXTRAS

4HC-H water filtration

CORRESPONDING WATER FILTERS

4HC-H Twin Water Filter, 4HC Replacement Cartridge

CORRESPONDING BIN(S)

B-140SB, B-210SB, B-340SB

CORRESPONDING TOP KITS


TK-8D for B-210SB, TK-8D + TK18D for B-340SB

CERTIFICATIONS

Hoshizaki Europe B.V.
Burgemeester Stramanweg 101
1101 AA Amsterdam
The Netherlands

HEBV Amsterdam office T. +31 (0)20 691 8499
Export line direct T. +31 (0)20 565 0429
sales.ex@hoshizaki-europe.com
service.ex@hoshizaki-europe.com
www.hoshizaki-europe.com

KMD-210ABE-HC

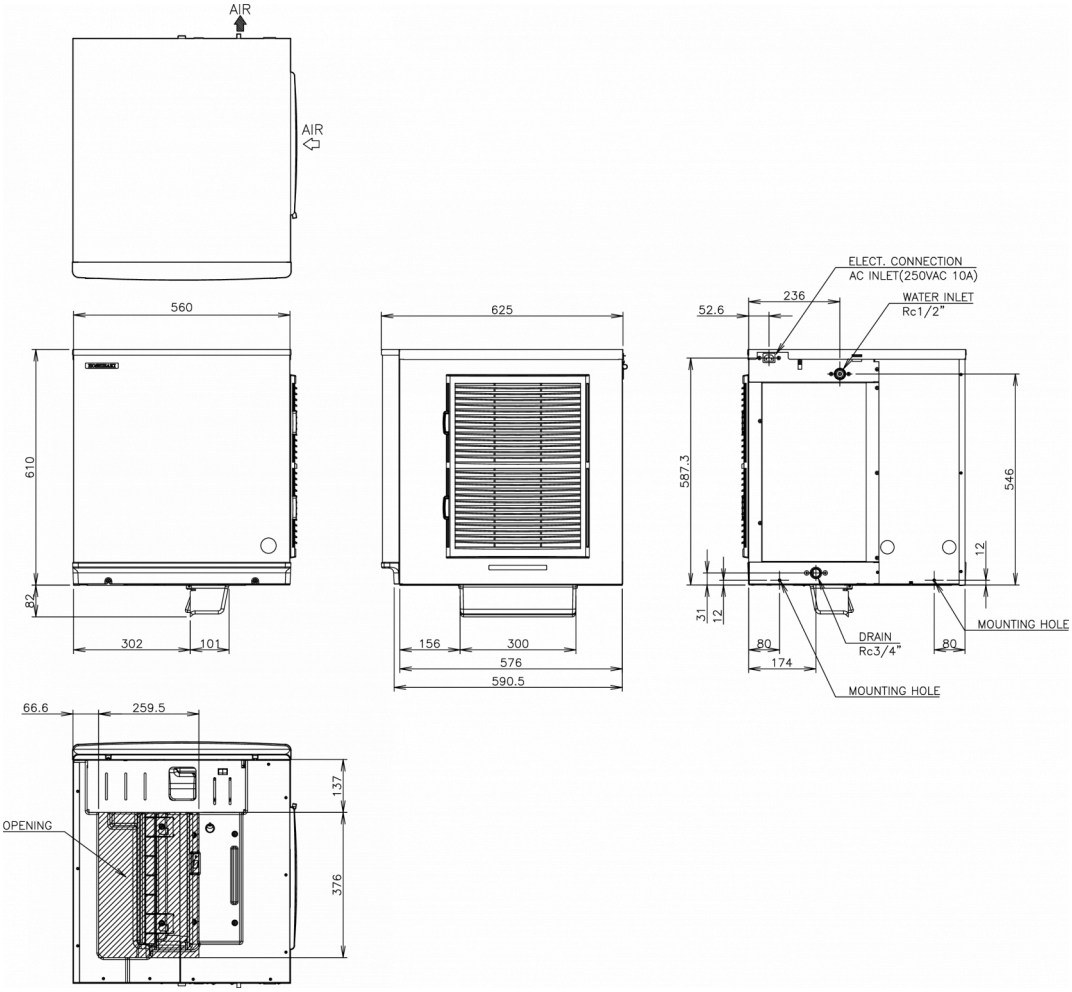

TECHNICAL SPECIFICATIONS

Cooling system	Power supply	Electric Consumption	Electrical circuit breaker protection	Heat Rejection (AT 32°C, WT 21°C)	Production Capacity (kg/24h) - AT 10°C, WT 10°C	Production Capacity (kg/24h) - AT 21°C, WT 15°C	Production Capacity (kg/24h) - AT 32°C, WT 21°C	Water consumption (m3/24h) - AT 10°C, WT 10°C
Air Cooled	1/220 - 240V/50Hz	0,683 kW	5 A	1,441 kW	210	190	170	0,77

SHIPPING SPECIFICATIONS

Width (packed)	Depth (packed)	Height (packed)	Volume (packed)	Gross weight	Width	Depth	Height	Net weight
749 mm	867 mm	796 mm	0,517 m3	66 kg	560 mm	625 mm	610 mm	57 kg

Disclaimer: Every effort has been made to ensure that the information contained in this spec sheet is accurate at the time of publishing. Hoshizaki Europe BV assumes no responsibility or liability for typographical errors or omissions or for any misinterpretation of the information within the publication and reserves the right to change without notice.

HOSHIZAKI

Hoshizaki Belgium info@hoshizaki.nl
Hoshizaki Danmark info@hoshizaki.dk
Hoshizaki Deutschland vertrieb@hoshizaki.de
Hoshizaki France info@hoshizaki.fr
Hoshizaki Iberia info@hoshizaki.es
Hoshizaki Italia commerciale@hoshizaki.it
Hoshizaki Middle East sales.ex@hoshizaki-europe.com

Hoshizaki Netherlands info@hoshizaki.nl
Hoshizaki Norge salg@hoshizaki.no
Hoshizaki Sverige order@hoshizaki.se
Hoshizaki UK uksales@hoshizaki.uk
Export countries sales.ex@hoshizaki-europe.com
Other countries sales.ex@hoshizaki-europe.com

www.hoshizaki-europe.com